

BLUAO AIR-WATER HEAT EXCHANGERS FOR DOOR OR WALL MOUNTING


Characteristics	M.U.	BLUA0BX0A	BLUA0GX0A
Cooling capacity - W10A35	W	10000	10000
Water flow rate	l/h	2000	2000
Power supply	V ~ Hz	230 1~ 50-60	400/440 2~ 50-60
Width	mm	797	797
Height	mm	1932	1932
Depth	mm	206	206
Max. current	A	1,2	0,75
Fuse T	A	2	2
Absorbed electric power - W10A35	W	260	280
Duty cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Refrigerant	-	Water	Water
Hydraulic circuit max. pressure	bar	8	8
Air flow rate	m ³ /h	2420	2420
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
Protection level EN60529	-	IP55	IP55
Noise level	dB (A)	70	70
Weight	Kg	90	90
Conformity	-	CE	CE
Colour	-	RAL 7032 orange peel effect	

Accessories/Options	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000120
Level switch, NO	C16000140
Stainless steel version	
Special paint on request	

REMARK : The drilling templates are merely indicative.
Always put in touch with our technical-sales department for further explanation you should need.




Dimensions

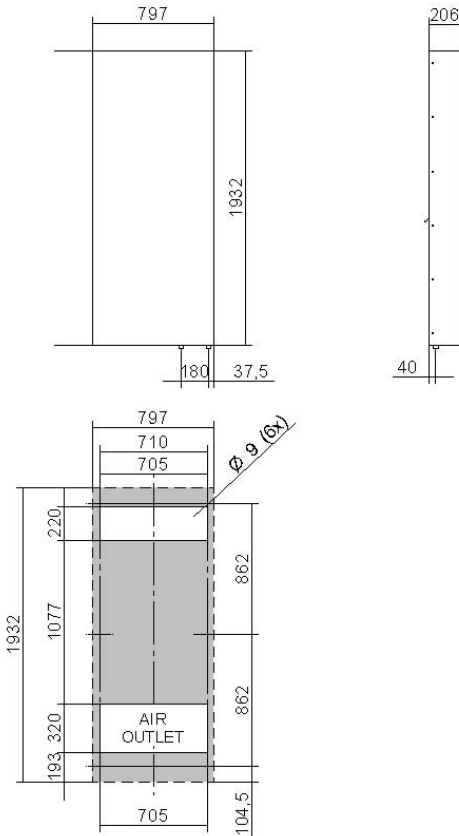

Drilling template

Performances

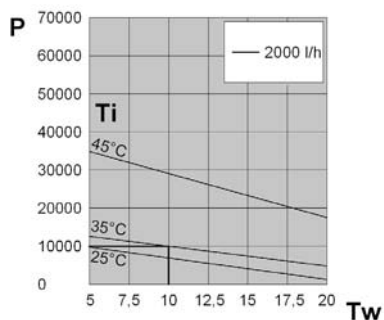

P = Cooling capacity (W)
Tw = Inlet water temperature (°C)
Ti = Inside enclosure temperature (°C)