# BLUA5 AIR-WATER HEAT EXCHANGERS FOR DOOR OR WALL MOUNTING

| Characteristics | M.U. | BLUA5BX0A | BLUA5GX0A |
|---|---|---|---|
| Cooling capacity - W10A35 | W | 15000 | 15000 |
| Water flow rate | l/h | 2000 | 2000 |
| Power supply | V ~ Hz | 230 1~ 50-60 | 400/440 2~ 50-60 |
| Width | mm | 797 | 797 |
| Height | mm | 1932 | 1932 |
| Depth | mm | 206 | 206 |
| Max. current | A | 1,4 | 0,9 |
| Fuse T | A | 4 | 2 |
| Absorbed electric power - W10A35 | W | 320 | 340 |
| Duty cycle | - | 100% | 100% |
| Electrical connection | - | Cable L = 3 m | Cable L = 3 m |
| Refrigerant | - | Water | Water |
| Hydraulic circuit max. pressure | bar | 8 | 8 |
| Air flow rate | m³/h | 2900 | 2900 |
| Internal temperature range | °C | 20-60 | 20-60 |
| External temperature range | °C | 1-70 | 1-70 |
| Protection level EN60529 | - | IP55 | IP55 |
| Noise level | dB (A) | 72 | 70 |
| Weight | Kg | 92 | 92 |
| Conformity | - | CE | CE |
| Colour | - | RAL 7032 orange peel effect | |

| Accessories/Options | |
|---|---|
| Thermostat 20-46°C, gas bulb 15A | C16000002 |
| Solenoid valve, NC | C15000120 |
| Level switch, NO | C16000140 |
| Stainless steel version | |
| Special paint on request | |

REMARK : The drilling templates are merely indicative.
Always put in touch with our technical-sales department for further explanation you should need.

## Performances

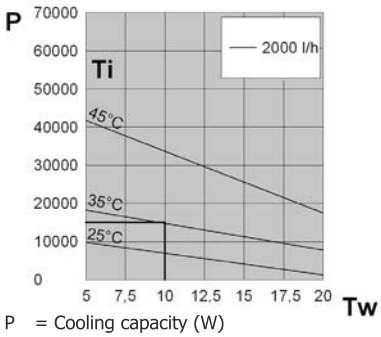


P = Cooling capacity (W)
Tw = Inlet water temperature (°C)
Ti = Inside enclosure temperature (°C)

## Dimensions

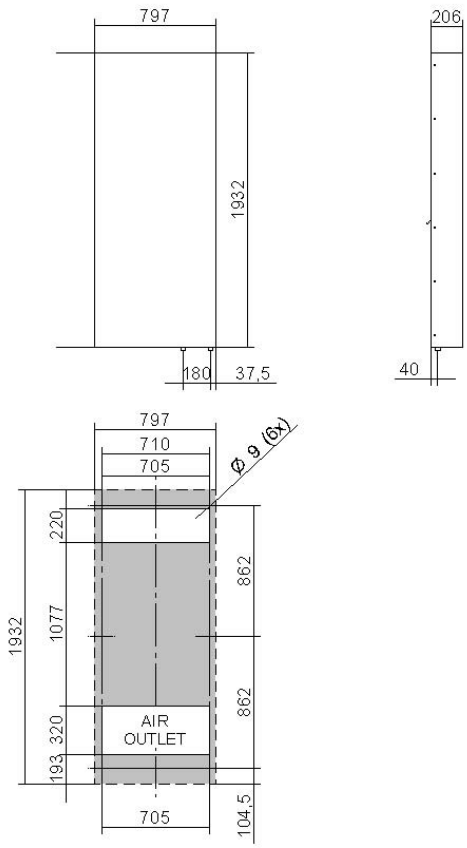


## Drilling template