

MIX36 AIR-AIR HEAT EXCHANGERS


Characteristics	M.U.	MIX36BX0A	MIX36CX0A
Specific cooling power	W/K	36	36
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	316	316
Height	mm	771	771
Depth	mm	93	93
Max. current	A	0,64	1,12
Fuse T	A	1	2
Absorbed electric power	W	140	150
Duty cycle	-	100%	100%
External fan air flow	m ³ /h	570	570
Enclosure fan air flow	m ³ /h	570	570
Temperature limits	°C	-5 +55	-5 +55
Protection level EN60529 - enclosure side	-	IP54	IP54
Noise level	dB (A)	67	67
Weight	Kg	10	10
Conformity	-	CE	CE
Colour	-	RAL 7032 orange peel effect	

Accessories/Options	
0-60°C thermostat, NO 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Stainless steel version	
Special paint on request	

REMARK : The drilling templates are merely indicative.
Always put in touch with our technical-sales department for further explanation you should need.





Dimensions

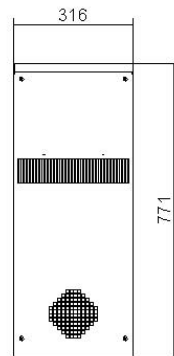


External

Internal

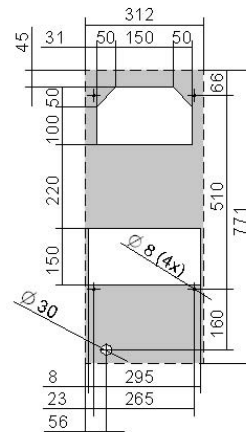


External

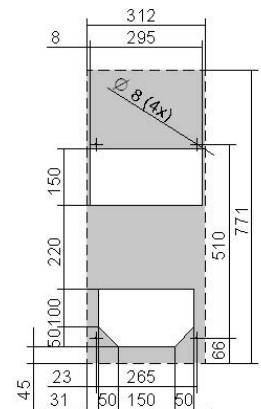

Internal

Drilling templates

Performances

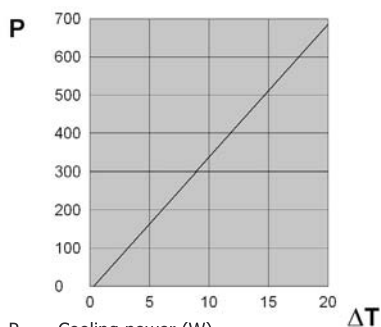

P = Cooling power (W)
 ΔT = Differential temperature (Tin-Tex) (K)